
IBERLAMP


# SPECIFICATION

| | | |
|---|---|---|
| **Product model** | M-123526+B | |
| **Product Size (mm)** | Ø150*135 | |
| **Product description** | **Body material** | Die Casting Aluminum |
| | **Optical cover material** | PC |
| | **Surface finish** | Pure polyester powder coating |
| | **Safety** | CLASS I |
| | **Protection Grade** | IP65、IP67 |
| | **Impact Strength(IK)** | IK08 |
| | **UV-Resistant** | F1 |
| | **Rated Power** | 8 W |
| | **LED Module Rated Power** | 4W*2 |
| | **Input Voltage** | 100-240V ~ |
| | **Frequency Range** | 50/60Hz |
| | **Luminaire luminous efficiency(EFF)** | 5 lm/W |
| | **Imax(cd)** | 94 cd |
| | **Luminaire Efficiency(LOR%)** | 4 |
| | **Total Flux** | 40 lm |
| | **Beam angle(At 50% of Imax)** | 40° |
| | **Energy Efficiency Index(EEI)** | 0.20 |
| | **Colour rendering index(Ra)** | ≥80 |
| | **Colour Temperature(CCT)** | 3000 K |
| | **SCDM** | ≤5 |
| | **Surge transient protection** | L/N:2KV |
| | **Working temperature** | -30℃ ~ +45℃ |
| **LED Chip** | **LED Brand** | CREE |
| | **LED Model No.** | 5050 |
| | **LED Nominal Flux(lm)** | 440 lm |
| | **LED Quantity** | 2 PCS |
| | **Life Span** | 50000 Hrs |
| **Driver** | **STOCK NUMBER** | L-QD-PA137 |
| | **Driver Brand** | TUV approval |
| | **Driver Output** | 27-40VDC |
| | **Driver Effeciency** | ≥81% |
| | **Power Factor** | ≥0.9 |
| | **THD** | ≤16% |
| | **Ripple current** | ≤20% |
| **Certification** | **CE、CCC、CB、SAA、BIS** | |





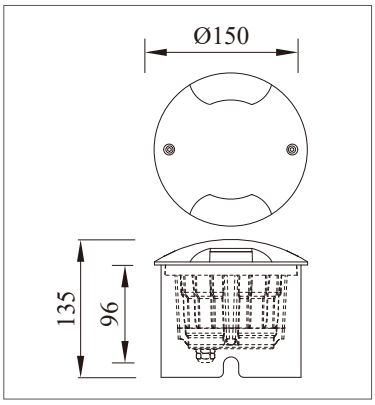

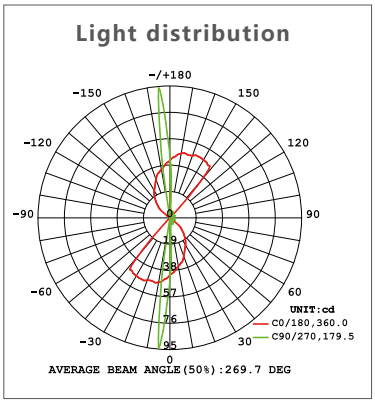
C/Artesans,4-Pol. Ind. Bovalar - 46970 Alaquas - Valencia - Spain
+34 644 775 554 / +34 667 788 071 / +34 667 788 072
info@iberlamp.com www.iberlamp.com CIF B-02797751