
IBERLAMP


SPECIFICATION

Product model	B-803073	
Product Size (mm)	Φ108*156*180mm	
Product description	**Body material**	Die Casting Aluminum
	Optical cover material	Tempered glass
	Surface finish	Polyester powder coating
	Safety	CLASS I
	Protection Grade	IP65
	Impact Strength(IK)	IK08
	UV-Resistant	F1
	Rated Power	13 W
	LED Module Rated Power	12W*1
	Input Voltage	100-240V~
	Frequency Range	50/60 Hz
	Luminaire luminous efficiency(EFF)	78 lm/W
	Imax(cd)	1961 cd
	Luminaire Efficiency(LOR%)	79
	Total Flux	1000 lm
	Beam angle(At 50% of Imax)	40°
	Energy Efficiency Index(EEI)	0.14
	Colour rendering index(Ra)	≥80
	Colour Temperature(CCT)	3000K
	SCDM	≤5
	Surge transient protection	L ⟶ N:2KV
	Working temperature	-30℃ ~ +45℃
LED Chip	**LED Brand**	CREE
	LED Model No.	1507
	LED Nominal Flux(lm)	1260 lm
	LED Quantity	1
	Life Span	50000 Hrs
Driver	**STOCK NUMBER**	L-QD-PA136
	Driver Brand	TUV approval
	Driver Output	27-40VDC
	Driver Effeciency	≥81%
	Power Factor	≥0.85
	THD	≤10%
	Ripple current	≤15%
Certification	CE、CCC、CB、SAA、BIS	





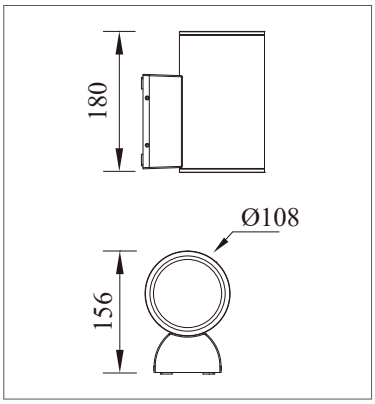

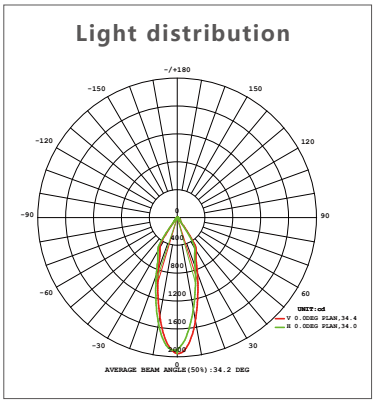

C/Artesans,4-Pol. Ind. Bovalar - 46970 Alaquas - Valencia - Spain
+34 644 775 554 / +34 667 788 071 / +34 667 788 072
info@iberlamp.com www.iberlamp.com CIF B-02797751