IBERLAMP


SPECIFICATION


Product model	B-803093	
Product Size (mm)	Ø108*165*260mm	
Product description	**Body material**	Die Casting Aluminum
	Optical cover material	Tempered glass
	Surface finish	Pure polyester powder coating
	Safety	CLASS I
	Protection Grade	IP65
	Impact Strength(IK)	IK08
	UV-Resistant	F1
	Rated Power	28 W
	LED Module Rated Power	14W*2
	Input Voltage	100-240V ~
	Frequency Range	50/60 Hz
	Luminaire luminous efficiency(EFF)	71 lm/W
	Imax(cd)	1964 cd
	Luminaire Efficiency(LOR%)	73
	Total Flux	2000 lm
	Beam angle(At 50% of Imax)	40°
	Energy Efficiency Index(EEI)	0.28
	Colour rendering index(Ra)	≥80
	Colour Temperature(CCT)	3000K
	SCDM	≤5
	Surge transient protection	L/N:1.5KV
	Working temperature	-30℃ ~ +45℃
LED Chip	**LED Brand**	CREE
	LED Model No.	1507
	LED Nominal Flux(lm)	1365 lm
	LED Quantity	2
	Life Span	50000 Hrs
Driver	**STOCK NUMBER**	L-QD-PA160
	Driver Brand	YUNDA
	Driver Output	27-48VDC
	Driver Effeciency	≥81%
	Power Factor	≥0.9
	THD	≤10%
	Ripple current	≤15%
Certification	CE、CCC、CB、SAA、BIS	

Approval





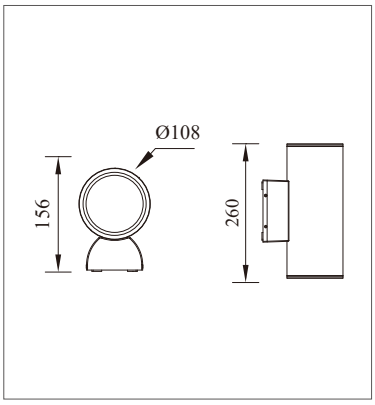

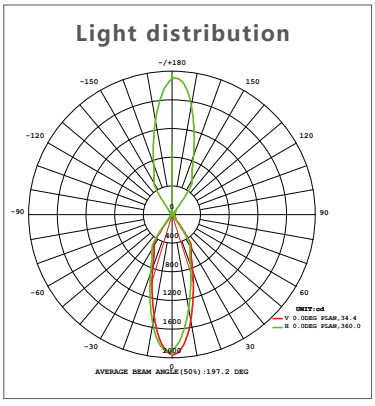

C/Artesans,4-Pol. Ind. Bovalar - 46970 Alaquas - Valencia - Spain
+34 644 775 554 / +34 667 788 071 / +34 667 788 072
info@iberlamp.com www.iberlamp.com CIF B-02797751