

IBERLAMP

SPECIFICATION

Product model	T-00H3-300	
Product Size (mm)	220*220*3000mm	
Product description	**Body material**	Die Casting Aluminum
	Optical cover material	/
	Surface finish	Pure polyester powder coating
	Safety	/
	Protection Grade	/
	Impact Strength(IK)	IK08
	UV-Resistant	F1
	Rated Power	/
	LED Module Rated Power	/
	Input Voltage	/
	Frequency Range	/
	Luminaire luminous efficiency(EFF)	/
	Imax(cd)	/
	Luminaire Efficiency(LOR%)	/
	Total Flux	/
	Beam angle(At 50% of Imax)	/
	Energy Efficiency Index(EEI)	/
	Colour rendering index(Ra)	/
	Colour Temperature(CCT)	/
	SDCM	/
	Surge transient protection	/
	Working temperature	-30℃ ~ +45℃
LED Chip	**LED Brand**	/
	LED Model No.	/
	LED Nominal Flux(lm)	/
	LED Quantity	/
	Life Span	/
Driver	**STOCK NUMBER**	/
	Driver Brand	/
	Driver Output	/
	Driver Effeciency	/
	Power Factor	/
	THD	/
	Ripple current	/
Certification	CE、CCC、CB、SAA、BIS	





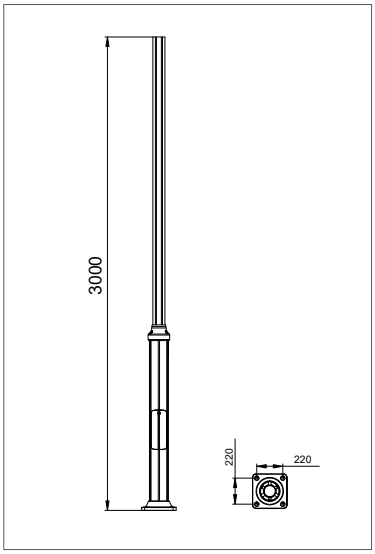

C/Artesans,4-Pol. Ind. Bovalar - 46970 Alaquas - Valencia - Spain
+34 644 775 554 / +34 667 788 071 / +34 667 788 072
info@iberlamp.com www.iberlamp.com CIF B-02797751