


IBERLAMP

SPECIFICATION


Product model	B-003327	
Product Size (mm)	137*55*162	
Product description	**Body material**	Die Casting Aluminum
	Optical cover material	Tempered glass
	Surface finish	Pure polyester powder coating
	Safety	CLASS I
	Protection Grade	IP65
	Impact Strength(IK)	IK06
	UV-Resistant	F1
	Rated Power	11 W
	LED Module Rated Power	1W*10
	Input Voltage	100-240V~
	Frequency Range	50/60Hz
	Luminaire luminous efficiency(EFF)	97 lm/W
	Imax(cd)	4596 cd
	Luminaire Efficiency(LOR%)	83
	Total Flux	995 lm
	Beam angle(At 50% of Imax)	15°
	Energy Efficiency Index(EEI)	0.71
	Colour rendering index(Ra)	≥80
	Colour Temperature(CCT)	3000 K
	SDCM	≤5
	Surge transient protection	L/N:2KV
	Working temperature	-30℃ ~ +45℃
LED Chip	**LED Brand**	OSRAM
	LED Model No.	3030
	LED Nominal Flux(lm)	120 lm
	LED Quantity	10 PCS
	Life Span	50000 Hrs
Driver	**STOCK NUMBER**	L-QD-PA136
	Driver Brand	TUV approval
	Driver Output	27-40VDC
	Driver Effeciency	≥81%
	Power Factor	≥0.85
	THD	≤10%
	Ripple current	≤15%
Certification	**CE、CCC、CB、SAA、BIS**	

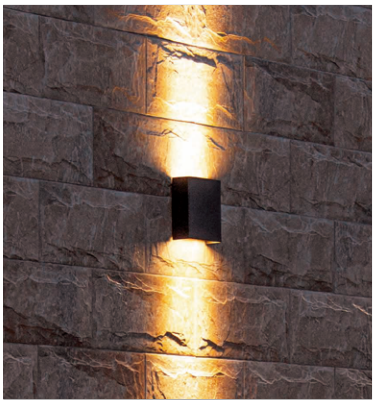

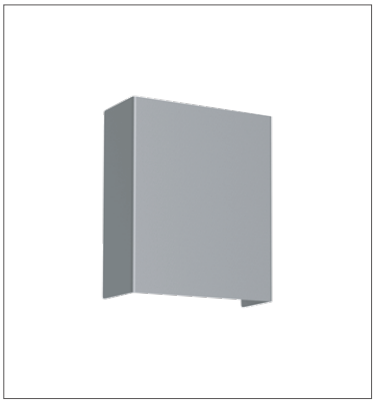

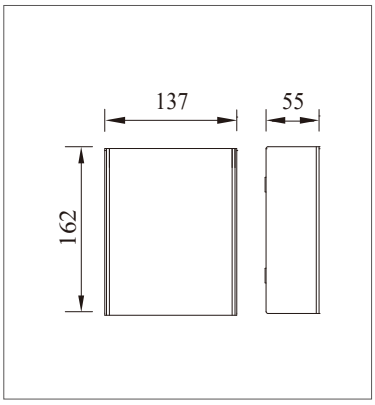

Light distribution

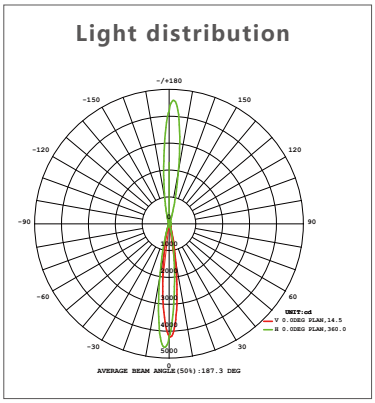

C/Artesans,4-Pol. Ind. Bovalar - 46970 Alaquas - Valencia - Spain
+34 644 775 554 / +34 667 788 071 / +34 667 788 072
info@iberlamp.com www.iberlamp.com CIF B-02797751